SHANGHAI DADA Eletric Co.,Ltd.















DAB7-63 6KA/10KA MCB Nova series Miniature Circuit Breaker				
Rated Current (In):	1,2,3,4,5,6,8,10,13,16,20,25,32, 40,50,63A			
No.of Pole	1P			
Rated Voltage (Ue)	240/415V			
Rated Breaking Capacity	6,000A/10,000A			
Rated ImpulseVoltage (Uimp)	4,000V			
Electrical Life: Cycles	4,000			
Mechanical Life: Cycles	10,000			
Protection Degree	IP20			
Mounting	DIN rail 35mm			
Maximum Terminal for Cable	25mm²			

DAB7-6	33 6KA/10KA MCB Nova series	
N	liniature Circuit Breaker	
Technical Data		
Rated Current (In):	1,2,3,4,5,6,8,10,13,16,20,25,32, 40,50,63A	
No.of Pole	1P+N,2P	
Rated Voltage (Ue)	415V	
Rated Breaking Capacity	6,000A/10,000A	
Rated ImpulseVoltage (Uimp)	4,000V	
Electrical Life: Cycles	4,000	
Mechanical Life: Cycles	10,000	
Protection Degree	IP20	
Mounting	DIN rail 35mm	
Maximum Terminal for Cable	25mm²	
Maximum reminarior Cable	2011111	

DAB7-63 6KA/10KA MCB Nova series					
Miniature Circuit Breaker					
	Technical Data				
	Rated Current (In):	1,2,3,4,5,6,8,10,13,16,20,25,32, 40,50,63A			
	No.of Pole	3P			
	Rated Voltage (Ue)	415V			
	Rated Breaking Capacity	6,000A/10,000A			
	Rated ImpulseVoltage (Uimp)	4,000V			
	Electrical Life: Cycles	4,000			
	Mechanical Life: Cycles	10,000			
	Protection Degree	IP20			
	Mounting	DIN rail 35mm			
	Maximum Terminal for Cable	25mm²			

DAB7-63 6KA/10KA MCB Nova series				
Miniature Circuit Breaker				
Technical Data				
Rated Current (In):	1,2,3,4,5,6,8,10,13,16,20,25,32, 40,50,63A			
No.of Pole	3P+N,4P			
Rated Voltage (Ue)	415V			
Rated Breaking Capacity	6,000A/10,000A			
Rated ImpulseVoltage (Uimp)	4,000V			
Electrical Life: Cycles	4,000			
Mechanical Life: Cycles	10,000			
Protection Degree	IP20			
Mounting	DIN rail 35mm			
Maximum Terminal for Cable	25mm²			










DABL-63 6KA RCBO Nova series				
RCBO with Overcurrent Protection; with Overvoltage Protection				
Technical Data				
Rated Current (In)	6,8,10,13,16,20,25,32,40,50,63A			
No.of Pole	2P(1P+N), 4P(3P+N)			
Rated Voltage (Ue)	2P 240V~, 4P 415V~			
Rated Frequency	50/60Hz			
Rated Breaking Capacity	6,000A			
Rated ImpulseVoltage (Uimp	4,000V			
Rated Sensitivity I △ n	10,30,100,300mA			
Network Type				
(earth-leakage sensitivity)	AC,A,S			
Breaking Time Under I△n	≤0.1s			
Thermo-magnetic Release				
Characteristic	B,C			
Electrical Life: Cycles	4,000			
Mechanical Life: Cycles	10,000			
Protection Degree	IP20			
Mounting	DIN rail 35mm			
Maximum Terminal for Cable	25mm²			

DAFL-63 6KA RCBO (Electromagnetic Type) Nova series				
RCBO with Overcurrent Protection				
Technical Data				
Rated Current (In)	6,8,10,13,16,20,25,32,40,50,63A			
No.of Pole	2P(1P+N), 4P(3P+N)			
Rated Voltage (Ue)	2P 240V~, 4P 415V~			
Rated Frequency	50/60Hz			
Rated Breaking Capacity	6,000A			
Rated ImpulseVoltage (Uimp	4,000V			
Rated Sensitivity I △ n	30,100,300mA			
Network Type				
(earth-leakage sensitivity)	AC,A			
Breaking Time Under I△n	≤0.1s			
Thermo-magnetic Release				
Characteristic	B,C			
Electrical Life: Cycles	4,000			
Mechanical Life: Cycles	10,000			
Protection Degree	IP20			
Mounting	DIN rail 35mm			
Maximum Terminal for Cable	25mm²			

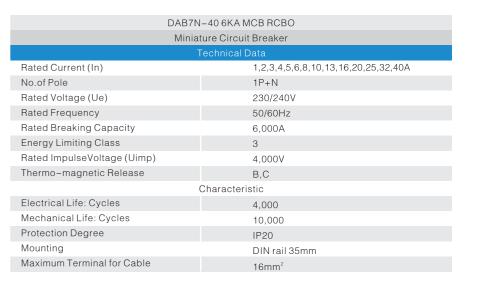



本资料仅用于说明本公司产品的相关信息,因产品持续升级导致的内容更新,或因对本手册进行的印刷失误带来的必要更改, 恕不另行通知,必要时请联系本公司,以核实有关信息。















SASO Intertek





Shanghai DaDa Electric Co., Ltd

- ② Address: No.171 Yezhuang Road. Zhuanghang, Fengxian, Shanghai, China













CDADA's newly developed products are simple in appearance, beautiful in design, rigorous in internal structure and reliable in quality. CDADA committed to becoming a world-class intelligent electric brand, and let every family and everyone can use CDADA's products with confidence and reassurance.





Shanghai DaDa Electric is one of the most specialized manufacturers and exporters for modular electric terminal devices for household and similar installations in China. The wide range products under manufacturing covers MCCB\MCB\RCCB\RCBO\DB box.

www.dadaele.com

creative for circuit breaker









30 Years of reliable circuit breaker supply